

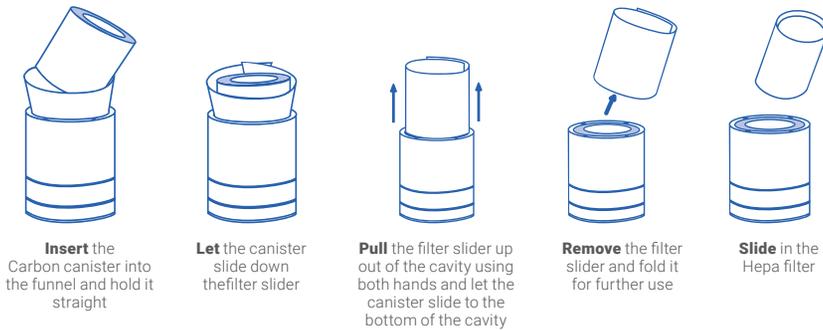
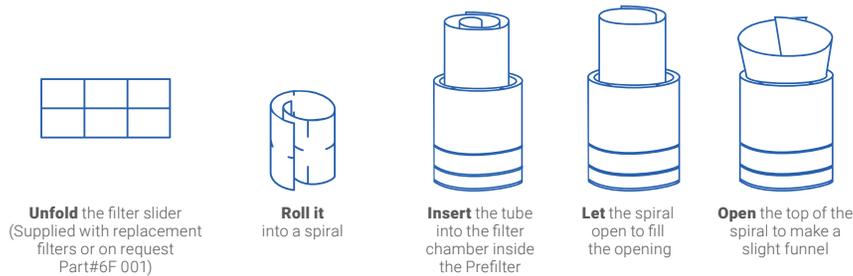


## To open the filter chamber

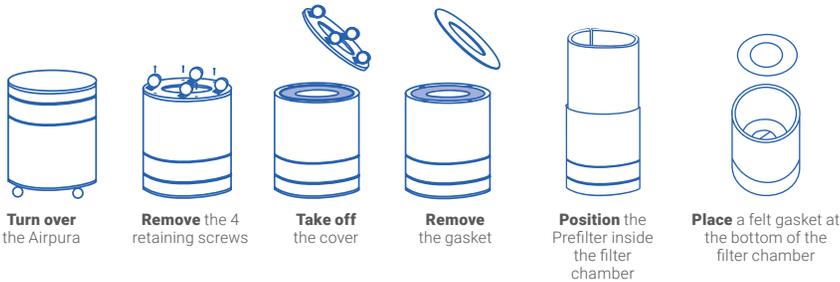

## To close the filter chamber

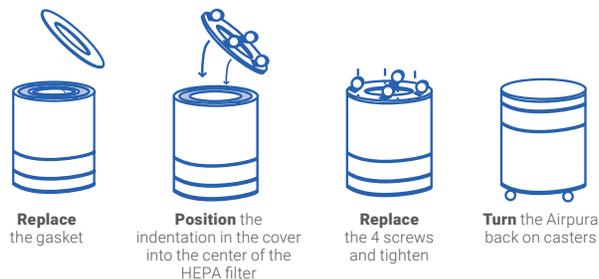

**Airpura**   
AIR PURIFIERS

# 1700

OPERATING  
&  
FILTER REPLACEMENT  
DIRECTIONS

# TO BEGIN USING YOUR AIRPURA

**Inspect the exterior of your Airpura** to verify there is no damage from shipping. If any damage is noted, please follow the instructions from the distributor returns policy.

**Wipe the unit** with a damp cloth to remove any dust from packaging

**Plug the unit** into a regular grounded 110 volt outlet

**It is recommended to set purifier on medium to high speed and allow to run for 48 hours before operating**

**Set the variable speed** control to the level you wish

The most efficient way to use your Airpura for regular air quality maintenance is to run it at a low speed **24 hours a day 7 days a week.**

**Always maintain a humidity level of 40% in your home to ensure the unit is operating at optimal levels. When using purifier with a dehumidifier, keep dehumidifier at least 6 feet away.**



## FILTER MAINTENANCE AND REPLACEMENT

### The Prefilter

Can be vacuumed from the exterior of the unit once a month or more often. Should be replaced at least after 12 months of use

### To vacuum the Prefilter


Use the brush attachment on your vacuum cleaner  
Vacuum slowly around the mesh surface of the filter chamber

## IMPORTANT SAFETY NOTE

Please ensure air purifier is turned OFF when plugging into a power source. Failure to do so may result in motor potentially stalling and/or burning.



**Poly Prefilter 600 2-pack**  
12 months

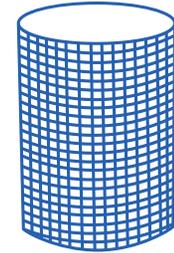

**HEPA Filter (99.99% efficient @ 0.1 Microns), 3 inch, 100 sq. ft.**  
4 to 7 years

**1600+: HEPA Filter w/ Metal End-Cap (99.99% efficient @ 0.1 Microns), 3 inch, 100 sq. ft.**

## Technical specifications

### Particle removal

Over 100 ft<sup>2</sup> true HEPA  
(Measured only 1 side)  
12 pleats per inch  
Pleats warm rolled with separators

### Air Flow 635 cfm

More cfm than any other home unit available

### Prefilter

570 in<sup>2</sup> x 1 in

### Housing

Powder coat steel

### Size

23 in x 15 in

### Weight

35 lbs total

### Watts

120 on high / 40 on low

### Sound Level

30.2\* db on low (at 6 feet)  
63.0 db on high (635 cfm)  
\*at test conditions

### Voltage options


115 or 220 volts

### ETL Certified

Conforms to CSA C22.2  
no 113 ANSI / UL 507

### Possible upgrade :

UV Germicidal Lamp, 20 Watts

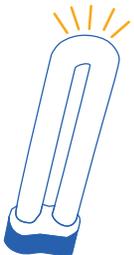

## Air purifiers models and filter configurations

	Prefilter	Particle	Carbon
<b>Alternates</b>	Cotton Prefilter TarBarrier Prefilter		Hi-C Carbon
<b>Upgrade</b>		HEPA 14 Filter (99.99% efficient @ 0.3 Microns) ULPA Filter (99.9999% efficient @ 0.1 Microns)	