



# T600DLX

EXTRA TOBACCO PROTECTION

HEAVY-DUTY PROTECTION AGAINST MOST CHEMICALS AND ODORS FOUND IN TOBACCO SMOKE

THE AIRPURA T600DLX  
Available in White / Black / Cream

THE AIRPURA LIMITED WARRANTY  
5 years parts / 10 years labor



## THE AIRPURA T600DLX ENHANCED CHEMICAL ABATEMENT UNIT OFFERS YOU:

- **26-LBS, ACTIVATED & ENHANCED CARBON FILTER** (17% potassium iodide, 83% coconut shell) offering protection against noxious chemicals, carcinogens and tars contained in tobacco smoke, chemicals released from common household products, construction materials and pesticides.
- The powerful **HEPA BARRIER** captures 95% of airborne particles, as small as 1 micron.
- **560 CFM INTEGRATED FAN / MOTOR** most cfm available in a portable unit.
- **FIXED SPEED CONTROLS** gives you complete control over your air flow and filtration
- **EXCELLENT DWELL TIMES** for effective filtration correctly calibrated air flow / bed depth for efficient adsorption.
- Streamlined inlet provides powerful suction of pollutants and provides **360° CLEAN AIR DISTRIBUTION**. Purification for up to 2,000 sq. ft with 2 air exchanges an hour (based on 8-foot ceilings).
- **WHISPER QUIET PERFORMANCE** even at highest speed setting.

## OVER 4000 CHEMICALS CAN BE REMOVED

Carbon blends are available to deal with over 4000 airborne chemicals including:

Ammonias  
Nitrous dioxide  
Nitrous trioxide  
Monoethylamine  
Hexane  
Hydrogen Sulfide  
Mercury vapors  
Chlorine dioxide  
Hydrogen Bromide  
Sulfur dioxide

Hydrogen fluoride  
Hydrogen chloride  
Benzene  
Methylene Chloride  
Radioactive Iodine  
Toluene  
Naphthene  
Pesticides  
Chlorine  
Mold Mycotoxins

## FILTER LIFE



**HEPA BARRIER FILTERS** should be changed every 12 months



**CARBON FILTERS** should be changed as needed in heavy applications and at least every 24 months in normal use. Airpura carbon canisters are refillable to save costs




**TARBARRIER** prefilters replaced 3-6 months depending on use.

EXPERIENCE THE EVOLUTION OF CLEAN AND HEALTHY AIR

## FILTRATION SYSTEM

- Cleanable pre-filter**  
Vacuum through grill and change every 12 months
- 26 lb Enhanced Impregnated Carbon filter**  
Adsorbs chemicals, odors and VOC's
- HEPA-Barrier post filter**  
Traps carbon dust and particles as small as 1 micron

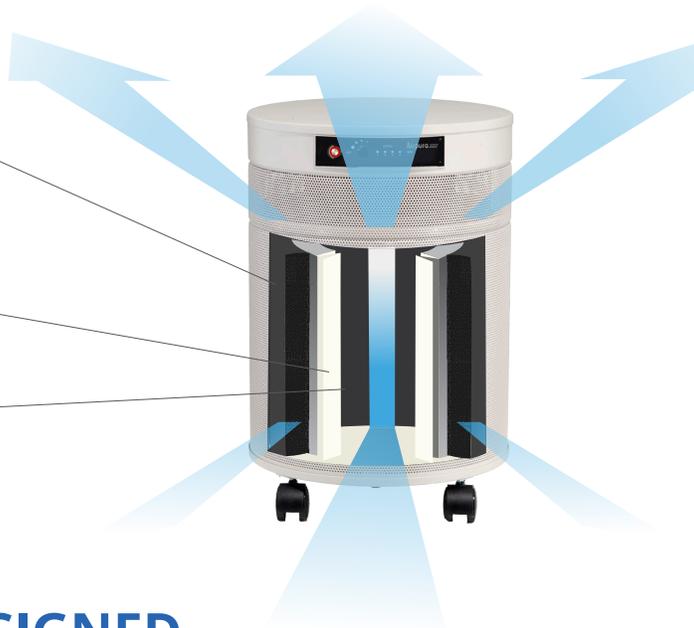

## SPECIALLY DESIGNED TO REMOVE AIRBORNE CHEMICALS AND VOCS

### DWELL TIME

For best results the correct dwell time of the pollutants over the enhanced carbon bed is vital. The 560 CFM impeller/motor combined with the fixed speed control and unimpeded airflow of the Airpura 600 series allows you to set the airflow precisely and achieve the results you need.

### EXPERTISE YOU CAN CALL ON

Airpura indoor air quality experts can offer you a solution to most airborne chemical problems. Contact your Airpura dealer or call us directly to discuss your needs.

## UNIQUE FEATURES

**ALL METAL HOUSING** ensures no plastic vapors are emitted.

**MOTOR OUT OF THE AIR FLOW.** Most air purifiers blow the clean air over the motor and pick up impurities.

**ELECTRICAL PARTS IN A SEALED CHAMBER OUT OF THE AIRFLOW.** Increases safety and prevents off-gassing

**PRESSURE SEALED FILTER CHAMBER** prevents leakage of polluted air around filters.

**FELT GASKETS SEAL THE FILTER CHAMBER.** Maximize filtration with no rubber off-gassing found with other filters.

**CLEAN MODERN APPEARANCE** fits in with any decor.

**LOW NOISE LEVEL**

## TECHNICAL SPECIFICATIONS

### ODOR, AIRBORNE CHEMICAL AND VOC CONTROL

26 lbs super enhanced activated carbon  
13"H x 13.25"OD x 7.5"ID

### CARBON BED

3" deep x 570 sq" surface

### TAR REMOVAL

Special Tar-Barrier filter  
570 sq in x 1 in deep

### PARTICLE SUPPRESSION

Post particle filter  
306 sq in

### AIR FLOW 560 CFM

More cfm than any other compact unit available

### HOUSING

Powder coated steel

### SIZE

23" x 15"

### WEIGHT

45 lbs total

### VOLTAGE OPTIONS

115 or 220 volts

### WATTS

120 on high / 40 on low

### SOUND LEVEL

34.2 db on low (at 6 feet)  
57.2 db on high (560 cfm)  
(Room level 25.1 db)

### ETL CERTIFIED

Conforms to CSA C22.2 no 113 ANSI / UL 507

YOUR  
AIRPURA™ DEALER

